



SOLID

2 - 2" LIFT HOLES
 STOCK @ 1', 1.5' & 3', CAN BE
 CUT OR Poured AS NEEDED




PERFORATED

24 - 2" x 2 1/2" TAPERED HOLES
 (2 SETS ON A GRID OF
 9", 18" & 27" VERT. \updownarrow , 12" HORIZ. \updownarrow)



LIDS

38" O.D. x 3" THICK (NON-TRAFFIC)
 STOCK SOLID OR WITH OPTIONAL 4" INSPECTION HOLE
 CAN BE CUSTOM Poured AS NEEDED

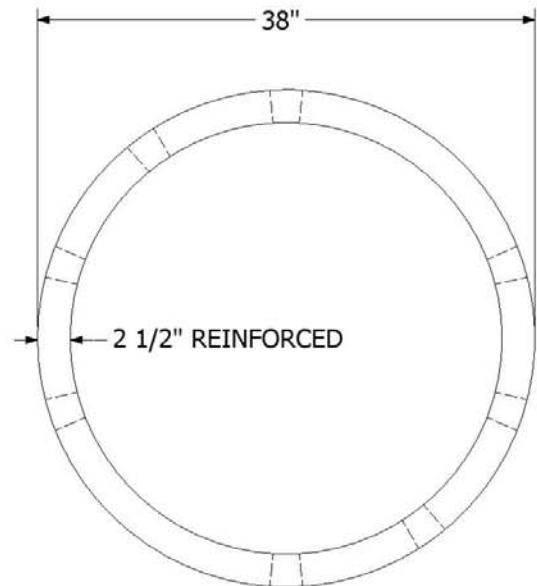

ADVANTAGE PRECAST I N C.

1302 Candlewood Dr N Voice: (503) 390-2048
 Keizer, Oregon 97303 Fax: (503) 390-1645
<http://www.AdvantagePrecast.com>

"A Locally Owned Small Business, Where Service Comes First."



**33" x 3'
 WELL CURB**

Concrete: **4000psi +**
 Weight: **Approx. 875 lbs.**

DATE:
 Oct. 2006