


PIPE DIAMETER	BARREL O.D.	BELL O.D.	JOINT LENGTH	W ALL	W t. Per Ft.
6"	8"	11"	3.5'	1"	30
8"	10"	14"	3.5'	1 ¼ "	50
10"	12 ½ "	16"	3.5'	1 ½ "	58
12"	16"	20"	6' / 7'	2"	120
15"	20"	24"	8'	2 ½ "	140
18"	24"	28"	8'	2 ¾ "	195
21"	27"	31"	8'	3"	245
24"	30"	35.5"	8'	3"	350
27"	34"	38"	8'	3 ½ "	440
30"	38"	43"	8'	4"	520
36"	44"	51"	8'	4"	675
42"	51"	58.5"	8'	4 ½ "	740
48"	58"	66"	8'	5"	925
60"	72"	78"	8'	6"	1575
72"	86"	90"	8'	7"	2150

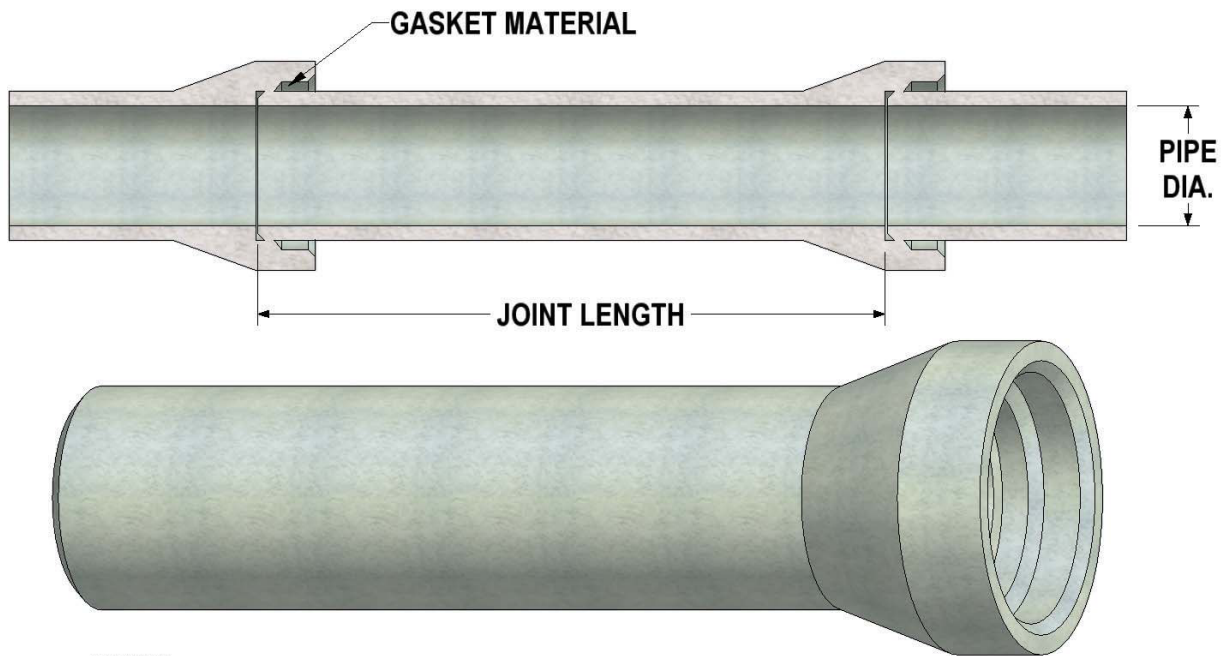

NOTES:

- 6", 8" AND 10" ARE C14-C3, NON-REINFORCED.
- 12"-24" ARE AVAILABLE IN C14-C3 (OR) C76-CIII, CIV & CV REINFORCED.
- 30"-72" ARE AVAILABLE IN C76-CIII, CIV & CV REINFORCED.
- LARGER DIAMETERS UPON REQUEST

ADVANTAGE PRECAST I N C.

1302 Candlewood Dr N Voice: (503) 390-2048
 Keizer, Oregon 97303 Fax: (503) 390-1645

<http://www.AdvantagePrecast.com>

"A Locally Owned Small Business, Where Service Comes First."



**CONCRETE PIPE
 BELL & SPIGOT**

Concrete: **4000psi +**

Weight: **SEE TABLE**

DATE:

Jul. 2007